
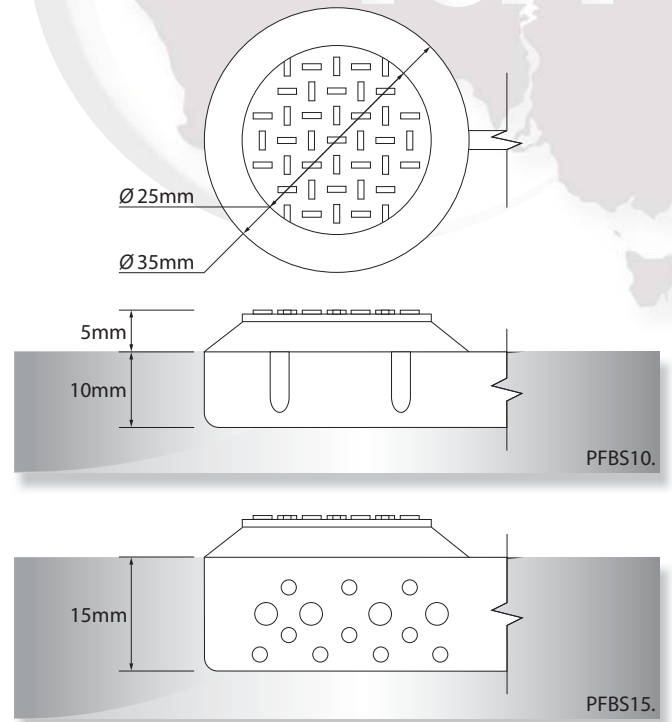


PFSA-Hazard Bladed Shaft TGS!

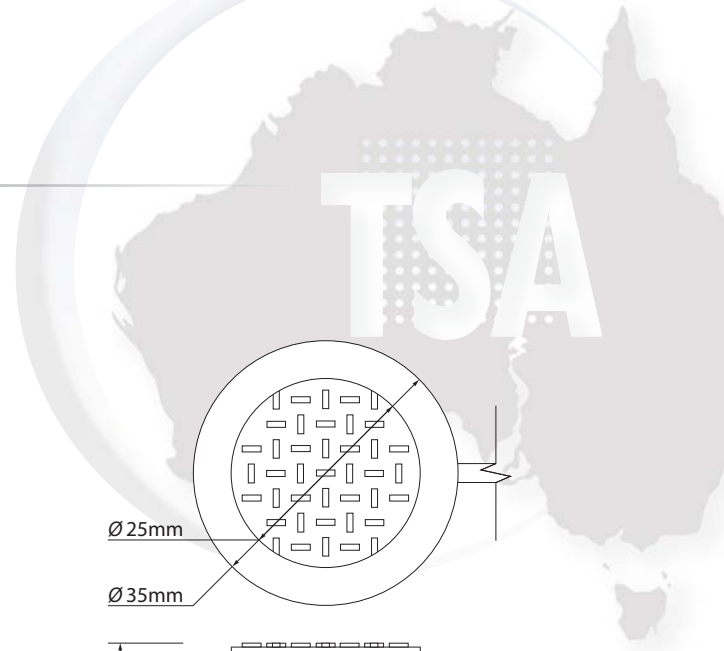

Tactile Ground Surface Indicator (Discrete).

Range.	TSA-Polurethane / Plastic Range
Group.	Hazard Indicator
Material.	Hard Wearing Polyurethane
Substrates.	Concrete, Bitumen, Tiles, Rubber
AS Standards.	Manufactured to AS/NZS 1428.4 .1 2009

Slip Resistance Testing.

Test.	AS/NZS 4586 - 2004 - APPENDIX D
Type.	Oil/Wet Ramp test
Class	Mean Over Acceptance Angle = 28.9°
Class.	Slip Resistance Assessment Group = R12

Report by.	CSIRO - Commonwealth Scientific & Industrial Research Organization
------------	--

TSA - Colours & Codes.



Colours.	10mm Shaft	15mm Shaft
Beige.	PFBS10-BEI	PFBS15-BEI
Black.	PFBS10-BLA	PFBS15-BLA
Blue.	PFBS10-BLU	PFBS15-BLU
Charcoal.	PFBS10-CHA	PFBS15-CHA
Cobalt.	PFBS10-COB	PFBS15-COB
Grey.	PFBS10-GRE	PFBS15-GRE
Terracotta.	PFBS10-TER	PFBS15-TER
Yellow.	PFBS10-YEL	PFBS15-YEL