

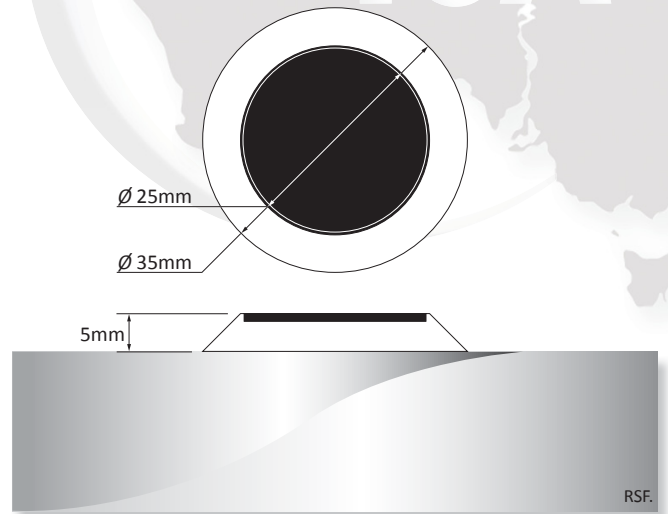
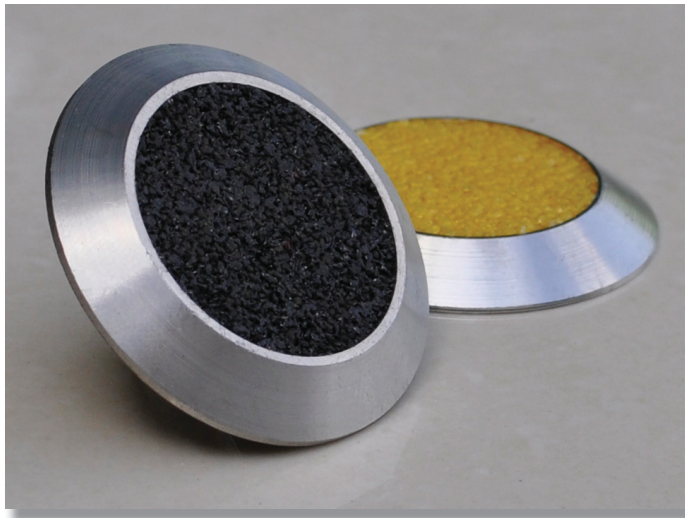


TSA.STEEL-TACT Carbo Series

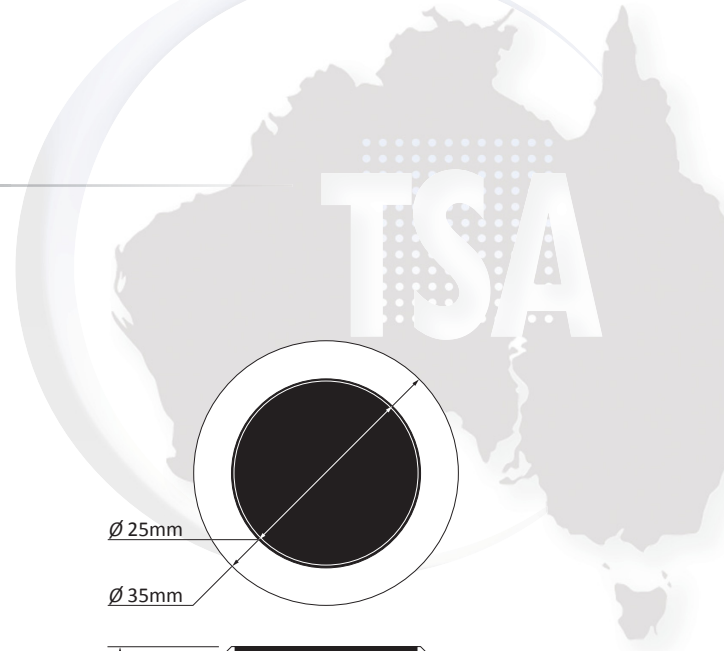


Tactile Ground Surface Indicator (Discrete).

| | |
|---------------|--|
| Range. | TSA.STEEL-TACT |
| Group. | Hazard Indicator |
| Material. | 316 Marine Grade Stainless Steel with Carborundum insert |
| Substrates. | Timber, Concrete, Bitumen, Tiles, Vinyl, Rubber, Carpet |
| AS Standards. | Manufactured to AS/NZS 1428.4 .1 2009 |

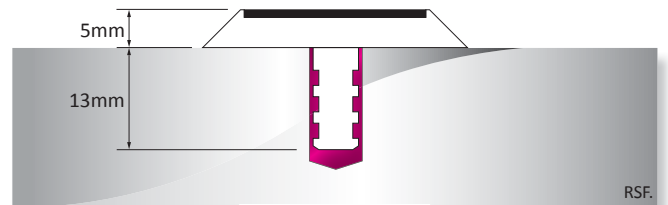

Slip Resistance Testing.

| | |
|--------|--|
| Test. | AS/NZS 4586 - 2004 - APPENDIX D |
| Type. | Oil/Wet Ramp test |
| Class | Mean Over Acceptance Angle = 33.6° |
| Class. | Slip Resistance Assessment Group = R12 |

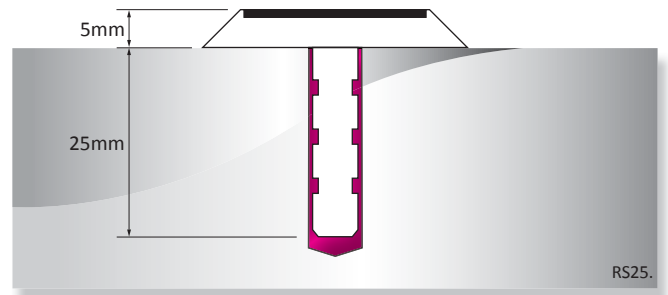

| | |
|------------|--|
| Report by. | CSIRO - Commonwealth Scientific & Industrial Research Organization |
|------------|--|

TSA - Colours & Codes.



| Colours. | 13mm. | 25mm. | Flat. |
|--------------|--------------|--------------|-------------|
| Black. | CI13-BLK | CI25-BLA | CIF-BLA |
| Brass/Black. | CI13-BRA/BLK | CI25-BRA/BLK | CIF-BRA/BLK |
| Yellow. | CI13-YEL | CI25-YEL | CIF-YEL |